


Floor plan — all layers

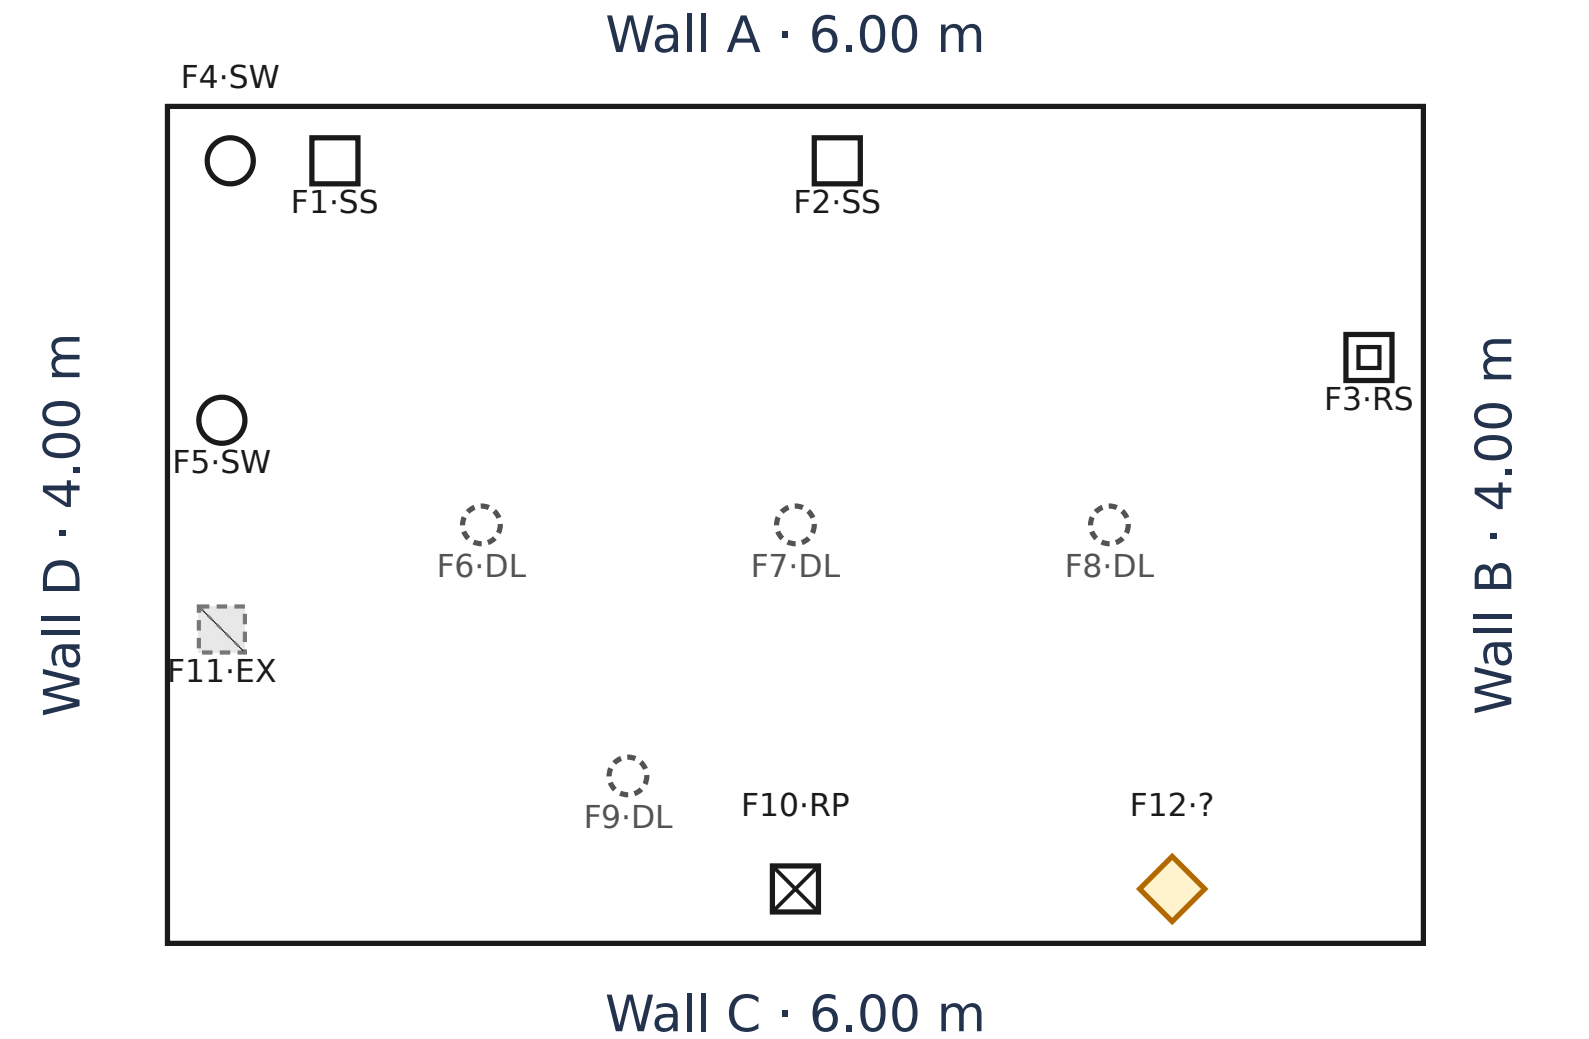


SS = New surface socket · RS = New recessed socket · RP = Replacement socket · SW = Switch · DL = Downlight · FS = Fused spur · 3P = Three-phase point · EX = Existing - no work · ? = Unknown - unpriced · downlights shown dashed on the ceiling

Room and job notes

6.00 × 4.00 × 2.70 m (w × d × h)


Made-up example job for review — not a real customer.

Wall A

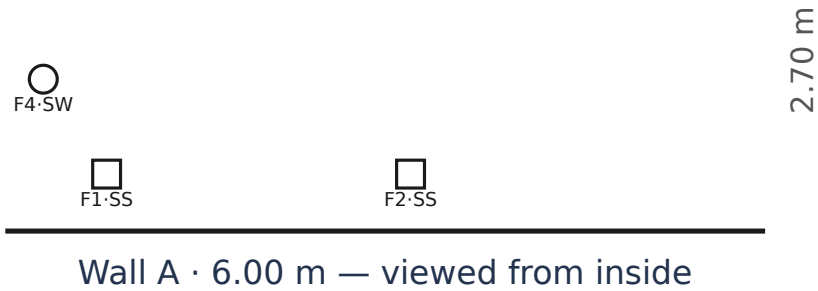


ID	Type	From left (mm)	Height (mm)	Notes
F1	New surface socket	800	450	Behind mirror station
F2	New surface socket	3200	450	
F4	Switch	300	1200	By door

Wall B

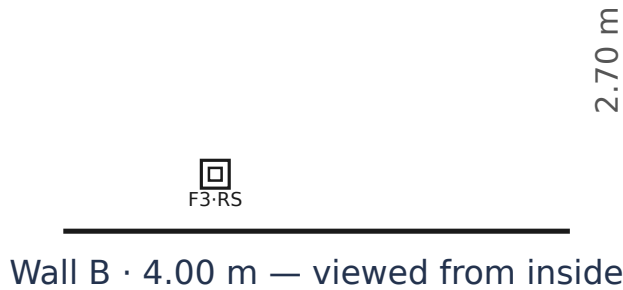


ID	Type	From left (mm)	Height (mm)	Notes
F3	New recessed socket	1200	450	Floor box by styling chair

Wall C

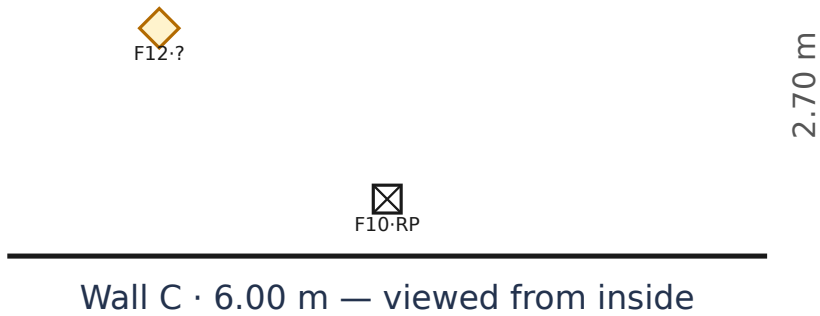

ID	Type	From left (mm)	Height (mm)	Notes
F10	Replacement socket	3000	450	
F12	Unknown - unpriced	1200	1800	Old isolator? - needs pricing

Wall D

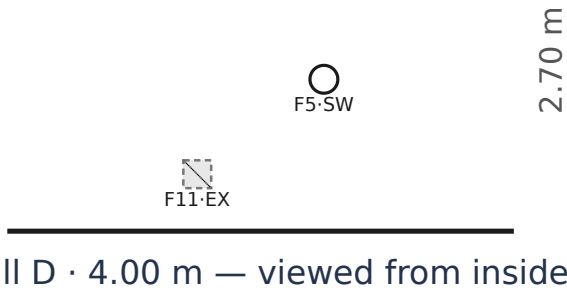

ID	Type	From left (mm)	Height (mm)	Notes
F5	Switch	2500	1200	Two-way
F11	Existing - no work	1500	450	Keep as is

Ceiling fittings

ID	Type	x (mm)	y (mm)	Notes
F6	Downlight	x 1500	y 2000	
F7	Downlight	x 3000	y 2000	
F8	Downlight	x 4500	y 2000	
F9	Downlight	x 2200	y 3200	

Labour breakdown — whole job, all layers

Work type	Qty	Rate	Line total	Status
New surface socket	2	£35.00	£70.00	priced
New recessed socket	1	£55.00	£55.00	priced
Replacement socket	1	£15.00	£15.00	priced
Switch	2	£25.00	£50.00	priced
Downlight	4	£30.00	£120.00	priced
Unknown - unpriced	1	—	—	unpriced
Existing - no work	1	—	—	excluded — no work

Total so far £310.00 — incomplete, 1 unpriced

Prototype with example labour rates only. Not a quotation, electrical design or installation advice. Cable and material costs are not included.

Tested with simulated pen and touch. Not yet tried on a real Surface; palm rejection unverified.