
Floor plan — all layers

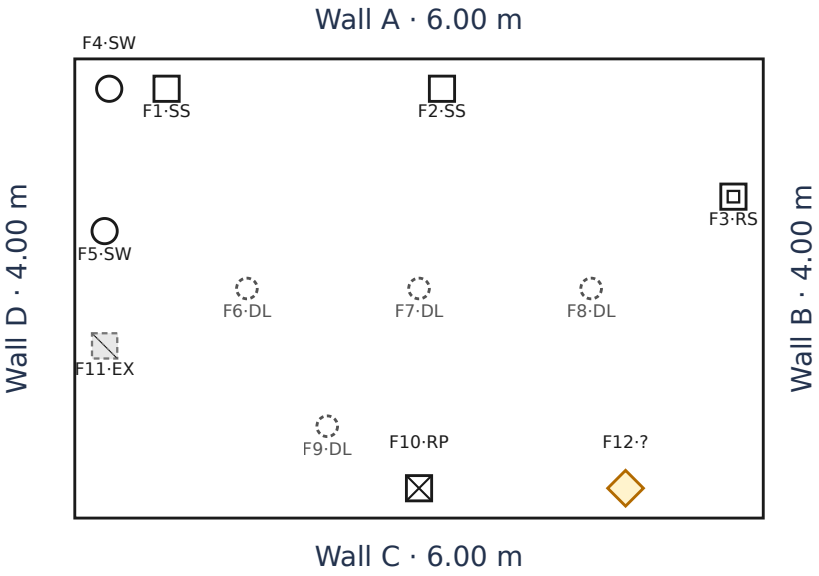


SS = New surface socket · RS = New recessed socket · RP = Replacement socket · SW = Switch · DL = Downlight · FS = Fused spur · 3P = Three-phase point · EX = Existing – no work · ? = Unknown – unpriced · downlights shown dashed on the ceiling · T trunking (solid band), C conduit (dashed line). Containment isn't priced or measured in this version.

Room and job notes

6.00 × 4.00 × 2.70 m (w × d × h)

Made-up example job for review — not a real customer.


Wall A

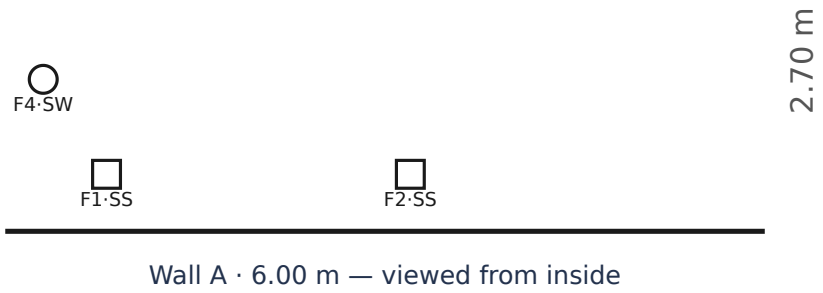

Wall A · 6.00 m — viewed from inside

ID	Type	From left (mm)	Height (mm)	Notes
F1	New surface socket	800	450	Behind mirror station
F2	New surface socket	3200	450	
F4	Switch	300	1200	By door


Wall B

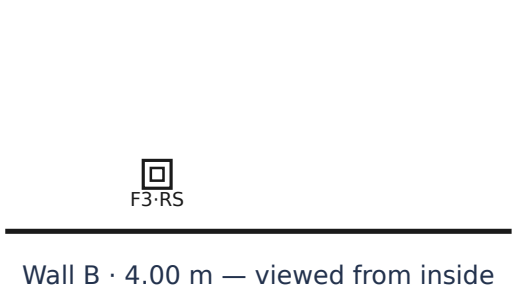

Wall B · 4.00 m — viewed from inside

ID	Type	From left (mm)	Height (mm)	Notes
F3	New recessed socket	1200	450	Floor box by styling chair


Wall C

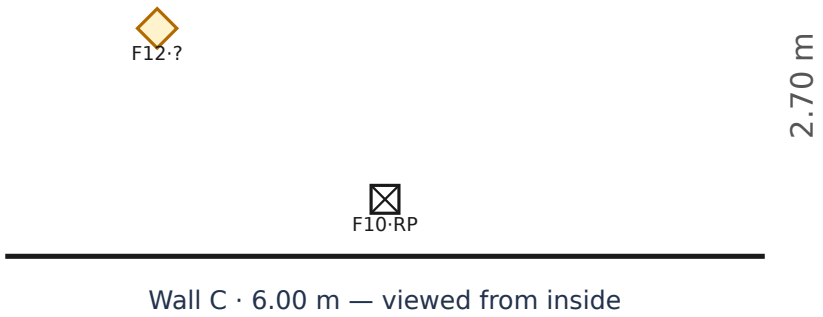

Wall C · 6.00 m — viewed from inside

ID	Type	From left (mm)	Height (mm)	Notes
F10	Replacement socket	3000	450	
F12	Unknown – unpriced	1200	1800	Old isolator? – needs pricing

Wall D

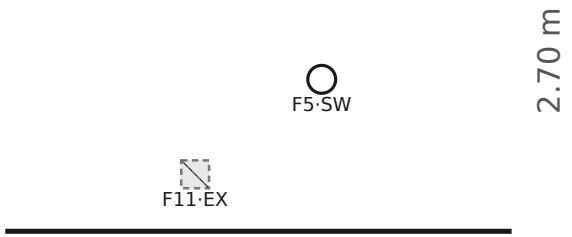

Wall D · 4.00 m — viewed from inside

ID	Type	From left (mm)	Height (mm)	Notes
F5	Switch	2500	1200	Two-way
F11	Existing – no work	1500	450	Keep as is

Ceiling fittings

ID	Type	x (mm)	y (mm)	Notes
F6	Downlight	x 1500	y 2000	
F7	Downlight	x 3000	y 2000	
F8	Downlight	x 4500	y 2000	
F9	Downlight	x 2200	y 3200	

Labour breakdown — whole job, all layers

Work type	Qty	Rate	Line total	Status
New surface socket	2	£35.00	£70.00	priced
New recessed socket	1	£55.00	£55.00	priced
Replacement socket	1	£15.00	£15.00	priced
Switch	2	£25.00	£50.00	priced
Downlight	4	£30.00	£120.00	priced
Unknown – unpriced	1	—	—	unpriced
Existing – no work	1	—	—	excluded — no work

Total so far £310.00 — incomplete, 1 fitting needs a price

Prototype with example labour rates only. Not a quotation, electrical design or installation advice. Cable and material costs are not included.

Tested with simulated pen and touch. Not yet tried on a real Surface; palm rejection unverified.